

MEGA-VOX

PORTABLE VOICE AMPLIFICATION SYSTEM


Powerful amplifier and horn driver combine for 126 db output.

At only 15 pounds, it's easy to carry.

Runs up to 10 hours on a charge.

Available with built-in wireless microphone receiver.

6 year warranty.

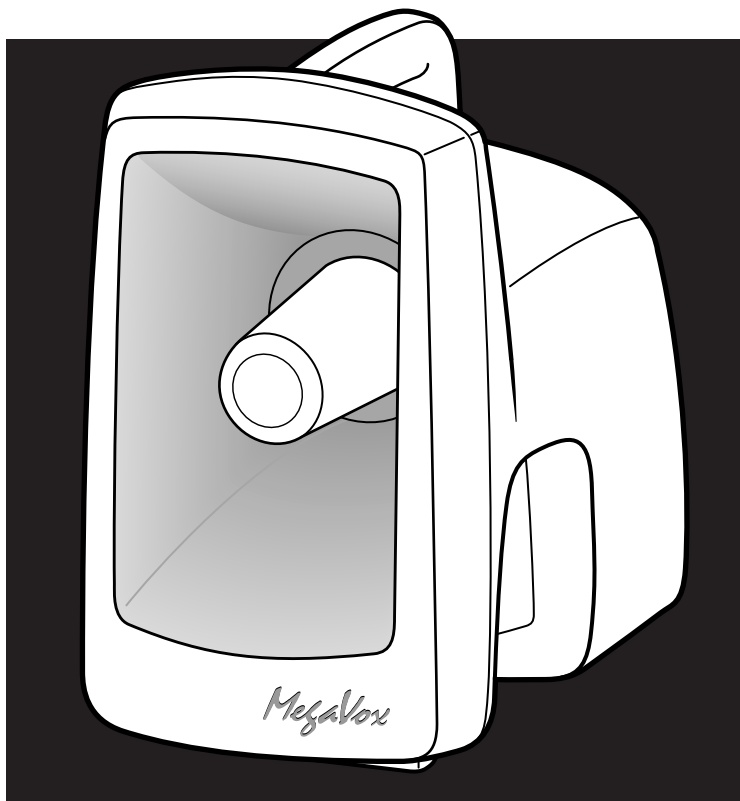


Injection-molded case.

Speaker stand receptacle molded into bottom.

High-efficiency re-entrant horn driver.

All models include dynamic microphone with coil cord.

Speaker output powers optional companion speaker.



Model PB-35W-1, PB-35W-2 shown

MODELS

PB-35

Battery-powered portable voice amplification system; includes microphone and charger.

PB-35W-1*, PB-35W-2*

Mega-Vox with wireless receiver; 2 selectable frequencies (order transmitter/mic separately).

PB-35W2-1*, PB-35W2-2*

Mega-Vox with dual channel wireless receiver; can operate on 2 frequencies simultaneously (order transmitter/mic separately).

WIRELESS MICS

*Wireless models and transmitters may be ordered with frequency pairs as follows:
suffix "-1": 169.445 and 170.245 mHz
suffix "-2": 171.105 and 171.845 mHz

WH-1000-1*, WH-1000-2*
Handheld wireless microphone/transmitter.

WL-1000-1*, WL-1000-2*
Wireless bodypack transmitter (order mic separately).

CM-1000
CollarMic microphone for use with WL-1000 transmitter.

HBM-35
Headband microphone for use with WL-1000 transmitter.

ACCESSORIES

SS-450
Heavy-duty speaker stand.

P-351
Unpowered companion speaker.

VL-35
Storage cover.

MIC-50
Replacement dynamic microphone with on/off switch.

SPECIFICATIONS

Mega-Vox, all Models

Rated power:	22 watts
Max SPL @ rated power:	126 dB @ 1 meter
Frequency response:	400 Hz - 10 kHz
Line input:	Hi-Z, unbalanced, 1/4"-phone
Line output (post fader):	Lo-Z, 1/4"-phone
Speaker output:	8Ω, unswitched, 1/4"-phone
Battery type:	12 volt rechargeable, 4.0 AH
Operation time:	6 - 10 hours (dependent upon use)
Charger (Anchor RC-16):	16 volts AC, 1.5A, 60Hz
Dimensions (HWD):	13 x 9 x 14"; 33 x 23 x 36 cm
Weight:	15 pounds, 6.8 Kg.

Models PB-35, PB-35W-1, PB-35W-2

Mic input 1:	Lo-Z, unbalanced, 1/4"-phone
Mic input 2:	Lo-Z, unbalanced, 1/4"-phone (for wireless use on PB-35W)

Models PB-35W2-1, PB-35W2-2

Wireless F1:	volume control for wireless channel 1
Wireless F2:	volume control for wireless channel 2
Mic:	Lo-Z, unbalanced, 1/4"-phone

Specifications subject to change without notice.