



# PIONEER SMARTLINK

Art. No. 3486

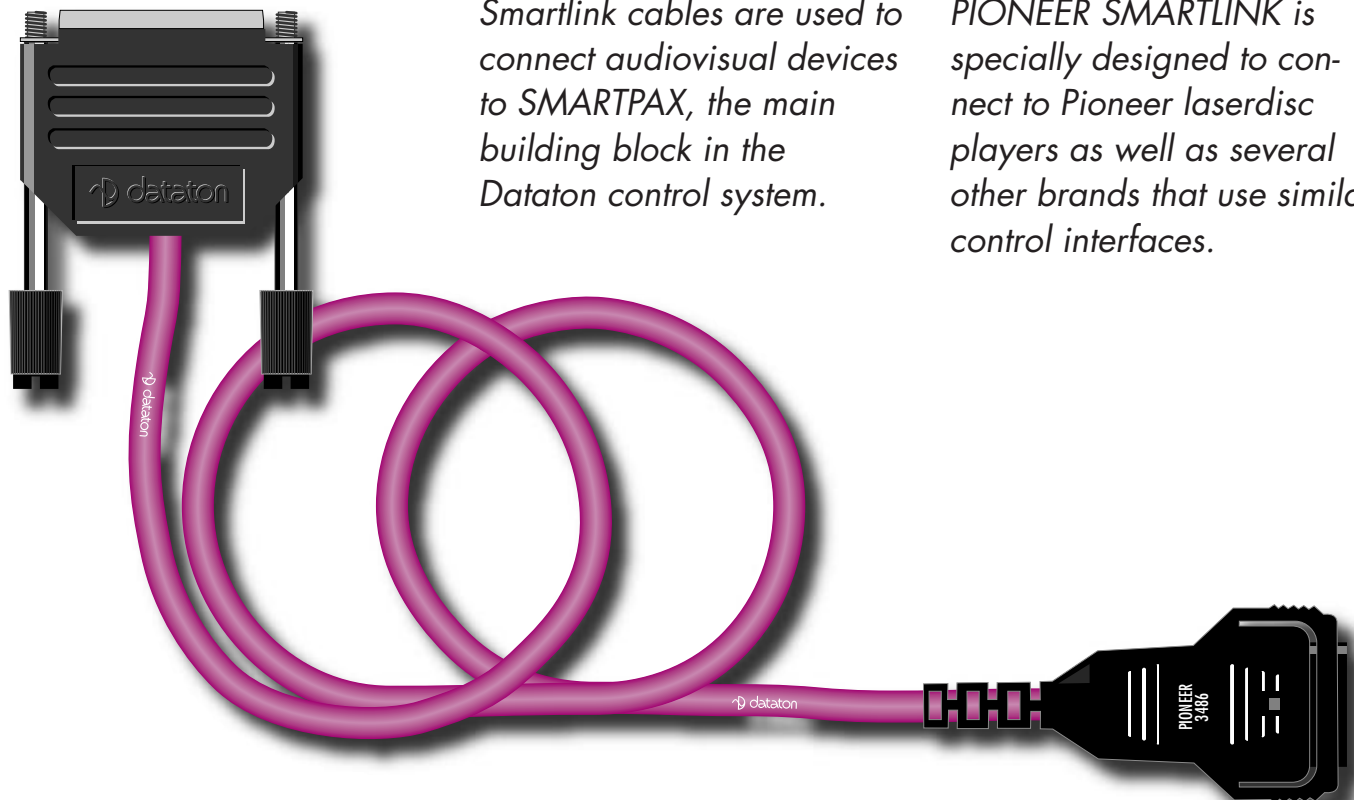

Smartlink cables are used to connect audiovisual devices to SMARTPAX, the main building block in the Dataton control system.

PIONEER SMARTLINK is specially designed to connect to Pioneer laserdisc players as well as several other brands that use similar control interfaces.

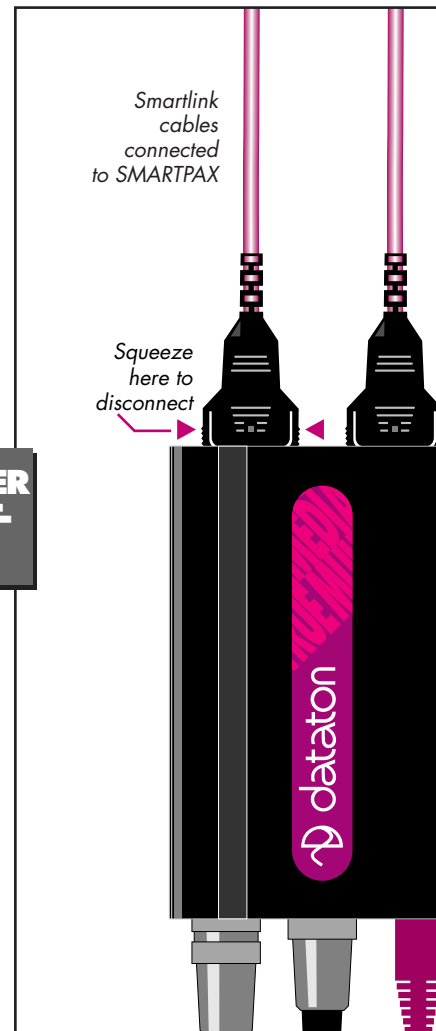**PIONEER  
SMART-  
LINK**


## INSTALLATION

Always connect the smartlink to both the device and the SMARTPAX before turning on the power. Plugging or unplugging with the power on may cause damage to the equipment! Try to keep the cable between the SMARTPAX and the device as short as possible to minimize ground loops.

## SMARTPAX CONFIGURATION

In most cases, SMARTPAX is configured automatically from Dataton TRAX. You must, however, manually set the SMARTPAX port address to correspond to the device's address in TRAX.

If you are using the manual mode in TRAX, you will need to configure the SMARTPAX using its port, address and device buttons.

Please refer to the SMARTPAX product sheet and the TRAX handbook for more details.

## CUSTOM SMARTLINKS

If you need to control an AV device not supported by a standard smartlink, you can make a custom smartlink using PAX AUXILIARY CABLE (article no: 3450).

## Technical Description

PIONEER SMARTLINK cables can be used to connect SMARTPAX to a number of serial controllable devices. If in doubt, contact your Dataton dealer for advice on which smartlinks to use with different devices, or consult the device database from within Dataton TRAX®.

PIONEER SMARTLINK has a standard cable length of 1.6m (63"). If necessary, you can extend this with Dataton EXTENSION CABLE, article number 3451 (1m), 3452 (2m) or 3455 (5m).

Pin number at SMARTPAX end	Signal symbol	Color code	Pin number on D-sub 15 pin male
1	Busy<	Brown	4
2	RxD<	Red	2
3	RxGND	Orange	1
4	TxD>	Yellow	3
5	Ready>	Green	
6			
7			
8	TxGND	White	1
9			
	Screen		