


ELMO

Overhead Projectors

HP-4K DX

Portable overhead projector

ELMO's self-contained portable overhead series combines outstanding design with powerful and brilliant screen performance.

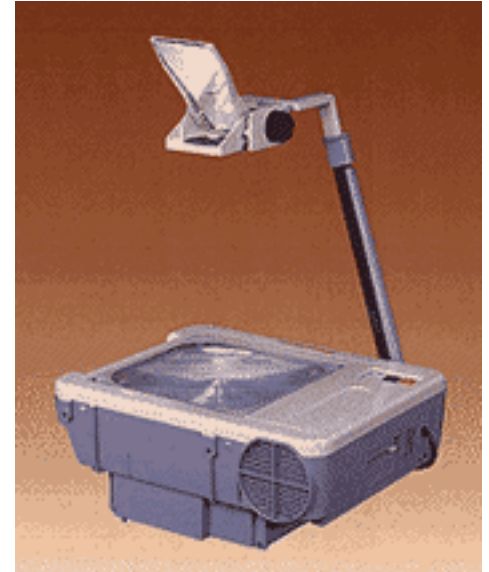

AC outlet	Provided
Aperture size	254X254 mm (10X10 in)
Carrying handle	Provided
Dimensions	Folded 463X384X129 mm (18.2X15.1X5.1 in) Assembled 463X384X705 mm (18.2X15.1X27.8 in)
Forced aid cooling	Built-in
Forced air cooling	Built-in
High/Normal lamp switch	Provided
Image size	0.89~2.67 m (2.9~8.6 ft)
Light output	3,000 lumen
Magnification	X3.5~10.5 X3.5~10.0
Pen tray	Provided
Power cord	3 m (9.8 ft) permanently attached
Power source	AC single phase 120V
Projected material	Transparency and roll
Projection distance	1.2~3.7 m (3.9~12.1 ft)
Projection lens	289-330 mm (11.4 - 13.0in) 3-element vari-focus 290 mm (11.4 in) 1-element
Safety interlock switch	Built-in safety interlock switch cuts off power when stage frame is opened.
Safety thermal cut-off switch	Built-in safety thermal cut-off switch automatically cuts off power to lamp of projector overheats.
Tilting angle adjustment	Up to 20
Weight	8.0 kgs (17.6 lbs)