


High-Resolution Day & Night DSP Color Camera TNC4614DN

PROFILE

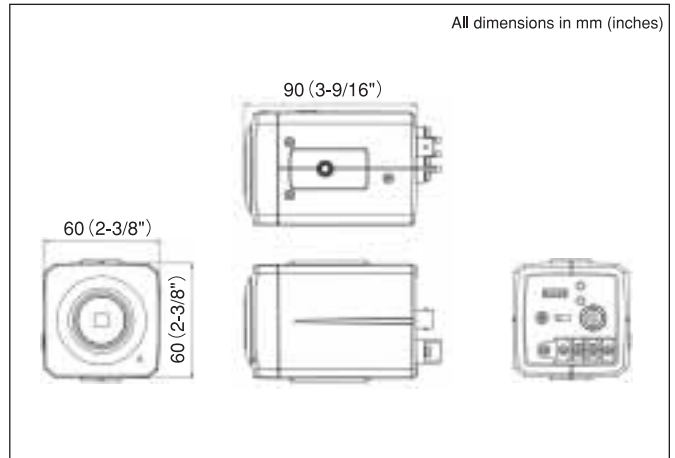

SPECIFICATIONS

Pick-up Device	1/3" Color interline transfer EXview HAD CCD
Effective Picture Element	768 (H) × 494 (V)
Scanning Area	4.88mm (H) × 3.66mm (V)
TV System	NTSC compatible
Scanning System	2:1 interlaced
Scanning Frequency	LL:15.75kHz (H) , 60Hz (V) INT:15.734kHz (H) , 59.95Hz (V)
Synchronization	Line-lock/Internal
Resolution	480TV lines (H) , 350TV lines (V)
S/N Ratio	50dB
Minimum Illumination	0.1 lx (F1.2)
Automatic Gain Control (AGC)	Built-in
Day/Night Mode Change	With ON-OFF switch
White Balance	ATW/Manual/Preset
Electronic Shutter	AES (1/60~1/100,000sec.)
Backlight Compensation	With ON-OFF switch
Video Out	VBS 1.0Vp-p 75Ω, BNC connector
Auto Iris Lens Compatibility	Selectable DC or Video
Lens Mount	CS (C with optional 5mm ring)
Power Source	AC24V / DC12V
Power Consumption	Approx. 4.5W
Ambient Temperature	-10° ~ +50°C (14° ~ 122°F)
Ambient Humidity	Less than 90%
Dimensions (W×H×D)	60×60×90mm (2-3/8×2-3/8×3-9/16")
Weight	300g (0.66lbs)

NOTE: Design and specifications are subject to change without prior notice.
 *Dimensions and weight are approximate.
 *EXview HAD CCD is a registered trademark of Sony Corporation.

ELMO ELMO CO., LTD.

Additional technical information is available from any of the following subsidiary companies;

ELMO Mfg. Corp.

1478 Old Country Road, Plainview, NY 11803-5034, U.S.A.
 Tel. 516-501-1400 Fax. 516-501-0429
 E-mail: elmo@elmousa.com
 Web: <http://www.elmousa.com>

ELMO Canada Mfg. Corp.

44 West Drive, Brampton, Ontario, L6T 3T6, Canada
 Tel. 905-453-7880 Fax. 905-453-2391
 E-mail: info@elmocanada.com
 Web: <http://www.elmocanada.com>

ELMO (Europe) G.m.b.H.

Neanderstr 18, 40233 Düsseldorf, Germany
 Tel. 0211-376051-53 Fax. 0211-376630
 E-mail: elmo@elmo.de
 Web: <http://www.elmo.de>

Distributed by

6-14, Meizen-cho, Mizuho-ku,
 Nagoya, 467-8567 Japan
 E-mail: foreign-div@elmo.co.jp