


AN-100

POWERED MONITOR

*25 watt amplifier
provides lots of sound.*

*Magnetically shielded
speaker.*


*Has mic, instrument
and 2 line inputs.*

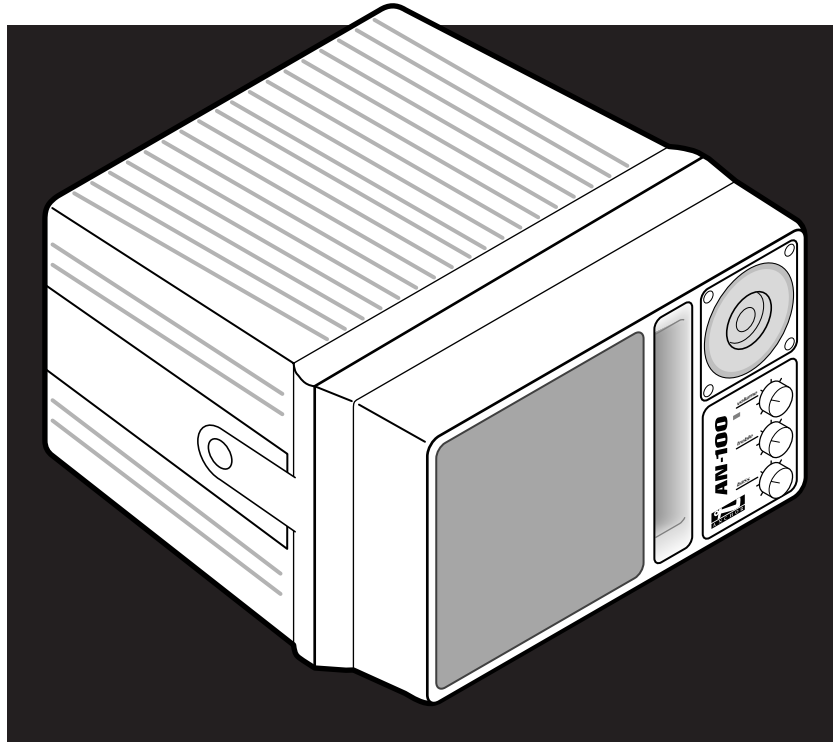

*Durable, injection-
molded case.*

*2-way speaker system
combines 4.5" woofer
and dome tweeter.*

6 year warranty.



AN-100 panel.

MODELS

AN-100

Powered monitor speaker.

AN-100W-1*, AN-100W-2*
*AN-100 with wireless receiver;
2 selectable frequencies (order
transmitter/mic separately).*

AN-100DC

*Powered monitor speaker with
12 volt DC output jack.*

WIRELESS

*Wireless models and transmitters may be
ordered with frequency pairs as follows:
suffix "-1": 169.445 and 170.245 mHz
suffix "-2": 171.105 and 171.845 mHz

WH-1000-1*, WH-1000-2*
*Handheld wireless microphone/
transmitter.*

WL-1000-1*, WL-1000-2*
*Wireless bodypack transmitter
(order mic separately).*

LM-30

*Lapel microphone for use with
with WL-1000 transmitter.*

CollarMic and headband mic also
available for WL-1000 transmitter.

ACCESSORIES

MIC-90P

*Handheld mic with 1/4"-phone
plug; balanced, low impedance.*

MSB-201

Combination mic/speaker stand.

SB-1

Swivel stand mounting bracket.

CC-100

Storage bag.

SPECIFICATIONS

AN-100

Rated power:	25 watts continuous
Sensitivity for rated output:	
Line:	-20 dBV (100 mVrms)
Microphone:	-43 dBV (7.5 mVrms)
Instrument:	-30 dBV (30 mVrms)
Frequency response:	65 Hz – 18 kHz
Max SPL @ rated power:	101 dB @ 1 meter
Line inputs (2):	Hi-Z, unbalanced, dual RCA jacks (summing L+R)
Mic Input:	Lo-Z, unbalanced, 1/4"-phone
Instrument Input:	(3k), unbalanced, 1/4"-phone
AC power requirements:	110-125 VAC 50/60 Hz (internally configurable)
	210-240 VAC 50/60 Hz (50 watts max)
Wireless frequencies:	F1: 169.445 and 170.245 mHz F2: 171.105 and 171.845 mHz
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	8.5 lbs, 3.8 kg
Specifications subject to change without notice.	