

AN-1000X


POWERED MONITOR

*50 watt sound system
with response from
65 Hz - 20 kHz.*

*Has RCA and 1/4" line
inputs, plus a mic/line
configurable XLR input.*

*Magnetically shielded
speaker.*

*220 volt CE-compliant
model available.*

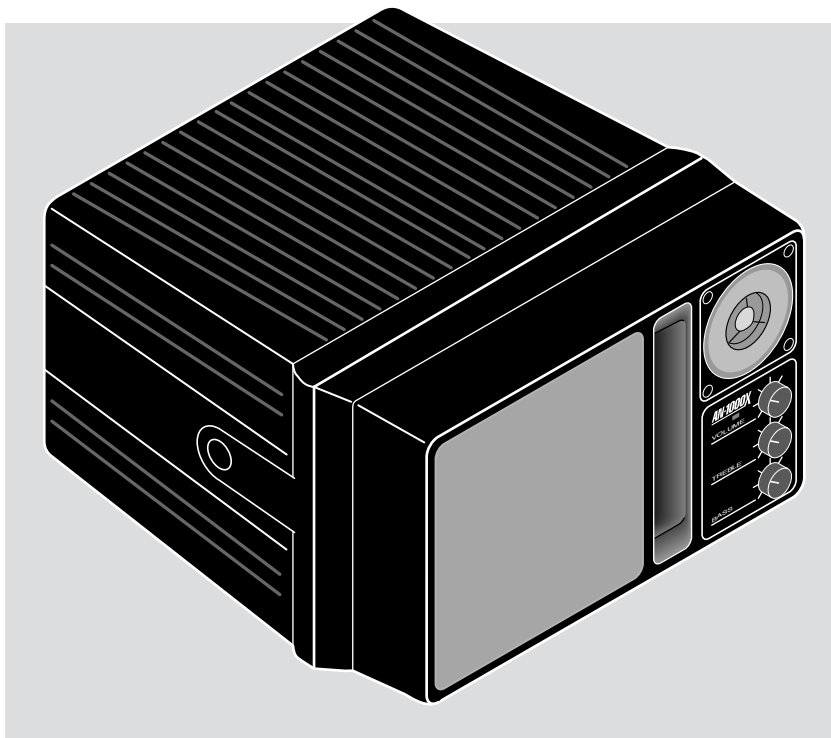


*Durable, injection-
molded case.*

*2-way speaker system
combines 4.5" woofer
and dome tweeter.*

*Speaker output drives
companion speaker.*

6 year warranty.

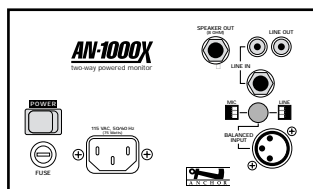

AN-1000X rear panel.

MODELS

AN-1000X

Powered 50-watt monitor speaker.

ACCESSORIES

MIC-90

*Handheld mic with XLR plug;
balanced, low impedance.*

AN-1001X

Unpowered companion speaker.

SS-250

Speaker stand.

SB-1

Swivel stand mounting bracket.

RM-1

Single rackmount kit.

RM-12

Dual rackmount kit.

SB-3

Wall mounting bracket.

SB-360

*360° Swivel wall mounting
bracket.*

CC-100

Storage bag.

SPECIFICATIONS

AN-1000X

Rated power:	50 watts continuous @ 4Ω
Frequency response:	65 Hz – 20 kHz ± 3dB
Max SPL @ rated power:	103 dB @ 1 meter
Balanced input:	mic / line configurable, female XLR, switchable phantom power
Line input:	Hi-Z, unbalanced, 1/4"- phone & RCA
Line output:	Lo-Z, RCA, buffer isolated line-level
Speaker output:	8Ω, unswitched, 1/4"- phone
AC power requirements:	110-125 VAC 50/60 Hz, 90 watts max
(AN-1000X/220):	208-240 VAC 50/60 Hz, 90 watts max
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	9.5 lbs, 4.3 Kg

Specifications subject to change without notice.