



SEVILLE

POWERED LECTERN

The Seville adds power, impact and authority to a presentation. And that's before you even turn it on.



- ▼ Powerful, 70-watt sound system can handle crowds of 750 or more.
- ▼ Sensitive electret microphone picks up the most soft-spoken presenters.
- ▼ Shock-absorbing mic mount lets you boost the volume without adding feedback or vibration noise.
- ▼ Optional built-in wireless microphone system.
- ▼ Top section, including sound system, lifts off for use as a tabletop lectern (deluxe model).
- ▼ 6 year warranty.



SEVILLE


POWERED LECTERN

Features

- ▼ 6 1/2" woofer coupled with extended-range horn tweeter provide natural voice projection
- ▼ integrated circuit amplifier with short circuit and thermal overload protection
- ▼ balanced mic-level output for use with in-house sound systems
- ▼ dual-intensity reading light
- ▼ microphone mounted on 18" gooseneck
- ▼ line-level output for recording
- ▼ lectern, auxiliary mic and line inputs can be mixed for multi-media presentations
- ▼ deluxe model has rich, golden oak surfaces and solid oak trim; LP-500 model available in oak or walnut finish
- ▼ tilt-n-roll casters for easy transport



The sound system is built into Seville's top section.

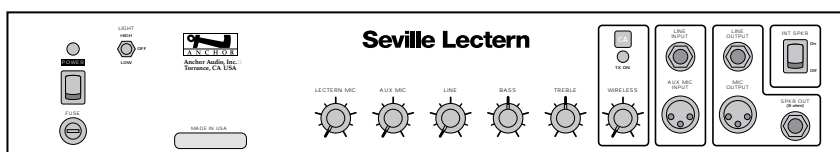

Control panel for wireless Seville.

Standard Seville (one-piece)

- LP-500 Lectern with sound system.
 LP-500W *Wireless* lectern with sound system.
(Available in walnut finish; add suffix "D")

Deluxe Seville (two-piece)

- LP-600M Deluxe lectern with sound system.
 LP-600MW *Wireless* deluxe lectern with sound system.
 LU-610 Deluxe lectern; no sound system.

Deluxe Seville Tabletop

- LT-601M Deluxe tabletop lectern with sound system.
 LT-601MW *Wireless* deluxe tabletop lectern with sound system.
 LU-601 Deluxe tabletop lectern; no sound system.

Wireless Mics and Transmitters

- WH-58 Handheld wireless microphone/transmitter.
 LM-60/WB-II Lapel microphone with WB-II wireless body-pack transmitter.
(WB-II also available with CollarMic and headband mic.)

Seville Accessories

- LC-650 Padded storage cover.
 LM-618 Gooseneck microphone (for Seville LU-610 and LU-601 with ASM-A).
 ASM-A Microphone shockmount kit (factory-installed option for LU-610 and LU-601).
 LL-615 Reading light (factory-installed option for LU-610 and LU-601).

Specifications

Rated power output	70 watts continuous
Max SPL @ rated power	107 dB @ 1 meter
Frequency response	65 Hz - 15 KHz
Speaker type	6.5-inch woofer, high-output tweeter
Inputs	
Lectern Mic input	Lo-Z, balanced, phantom power, XLR
Auxiliary Mic input	Lo-Z, balanced, phantom power, XLR
Line input	Hi-Z, unbalanced, 1/4"-phone
Sensitivity for rated output	
Microphone	-52 dBV (2.5 mVrms)
Line	-14 dBV (200 mVrms)
Outputs	
Mic output (post fader)	Lo-Z, transformer balanced, XLR
Line output (post fader)	buffer isolated, 1/4"-phone
Speaker output	70 watts @ 4Ω, switched, 1/4"-phone
AC Power requirements	110 - 125 Volts AC, 50/60 Hz 210 - 240 Volts AC, 50/60 Hz (40 VA nominal, 120 VA max)
Dimensions	
LP-500	49 x 24 x 21", 125 x 61 x 53 cm
LP-600M, LU-610	Top: 18 x 24 x 21", 46 x 61 x 53 cm Bottom: 31 x 24 x 21", 79 x 61 x 53 cm
LT-601M, LU-601	18 x 24 x 21", 46 x 61 x 53 cm
Weight	
LP-500	122 pounds, 55 Kg.
LP-600M	142 pounds, 64 Kg.
LT-601M	69 pounds, 31 Kg.
LU-610	130 pounds, 59 Kg.
LU-601	57 pounds, 26 Kg.

Specifications subject to change without notice.

102-0003-000 Rev. F



Anchor Audio, Inc. • 3415 Lomita Blvd. • Torrance, CA 90505 • (310) 784-2300